

Triflex ProJoint Profile



Product information

Applications


Triflex ProJoint Profile is used in the Triflex ProJoint+ system for expansion joints.

Properties

The Triflex ProJoint Profile is a polymer side section which protects expansion joints in multistorey and underground car parks. The profile consists of:

- Triflex ProJoint Profile
- Triflex ProJoint Expansion Strip

Pack sizes

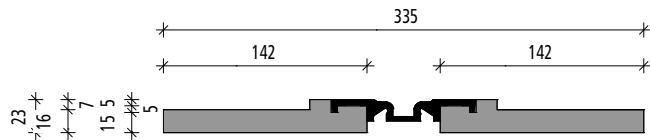

Triflex ProJoint Profile
Profile length: 120 cm

Triflex ProJoint Expansion Strip
10 cm x 26 m
10 cm x 13 m
10 cm x 6.5 m

Colours

Profile: Dark grey
Expansion strip: Black

Storage

To prevent deformations, the Triflex ProJoint Profile should be stored in a cool, dry indoor place at temperatures from +5 °C to +30 °C. It is advisable to store the joint profiles in a horizontal, flat position.



Instructions for use

Cut the Triflex ProJoint Profile to length. Degrease the flange of the profile using Triflex ProJoint Cleaner, then align and secure it on the Triflex ProDetail detail waterproofing system using Triflex Cryl Paste.

Clean the joint profiles and then secure the expansion strip with Triflex ProJoint Fix adhesive. Once the paste has cured, the surface protection system on the seated joint profile is brought up to the expansion strip.

General information

We guarantee the consistently high quality of our products. Non-Triflex products must not be used with Triflex systems.

The advice we give in relation to the application of our products is based on extensive development and many years of experience, and is correct to the best of our knowledge. Given the wide variety of on-site requirements and conditions, the user is required to test the product's suitability for the particular purpose. Technical information is subject to change without notice in the interests of technical advancement or enhancement of our products.